



Maintenance Tools



Less Friction. More Solutions.

With more than 100 years of experience in bearing technology, Timken understands the importance of proper maintenance procedures in maximizing product and equipment life. High-quality Timken maintenance products help to decrease downtime and operating costs.

Our line of maintenance tools are an example of how we extend beyond bearings with friction management solutions to keep your business running smoothly. These value-added products are grounded in our knowledge of motion, lubrication, friction and metallurgy. They are designed to help you extend bearing life in your applications through proper installation, removal and service.

For more than 100 years, Timken has provided quality products to the industrial marketplace. Our field support team is available to help you use these tools appropriately, as well as identify other Timken solutions that may boost your productivity and save you money.

Through our products, programs and services, we're providing less friction and more solutions to help you achieve greater success.

For more information, contact your local Timken distributor or sales representative.





Installation Tools

| | |
|-----------------------------------|----|
| INDUCTION HEATERS | 4 |
| IMPACT FITTING TOOLS | 14 |

Removal Tools

| | |
|--|----|
| HYDRAULIC & SELF-CENTERING HYDRAULIC PULLERS | 18 |
| MECHANICAL PULLERS | 20 |

| | |
|--------------------------|----|
| Accessories | 23 |
|--------------------------|----|

WARNING:

Proper maintenance and handling practices are critical. Failure to follow user manual can result in equipment failure, creating a risk of serious bodily harm.



**DO NOT WEAR
METAL OBJECTS
OR WATCHES.**



**USE HEAT
PROTECTIVE
GLOVES.**



**PROHIBITED FOR
PEOPLE WITH
A PACEMAKER
AND/OR HEARING
AID.**



CAUTION



**READ THE
INSTRUCTIONS.**

**DO NOT OPERATE AN
INDUCTION HEATER IN
AREAS WHERE THERE IS A
RISK OF AN EXPLOSION.**

INSTALLATION TOOLS



INSTALLATION TOOLS

Induction Heaters

Timken offers a large assortment of high-quality induction heaters designed for demanding industrial applications. They can heat and radially expand a wide variety of gears, rings, couplings, bearings and other components. All heaters are produced in accordance with International (IEC) and European (CE) health and safety requirements. They feature a microprocessor controlled power supply, automated time and temperature control and automatic demagnetization.



Why choose an induction heater?


Induction heating is a superior, fast and controlled heating method. It is a safer and more environmentally friendly alternative to traditional heating methods such as ovens, oil baths or blow torches. These methods cause fumes or oil waste and are not recommended for personal health and safety.

Timken induction heaters use the principle of induction, similar to a transformer. The heater and yokes remain cool; only the work piece is heated. During the induction heating cycle, a certain degree of magnetism occurs. All Timken heaters demagnetize automatically after each heating cycle.

Versatility, safety and quality.

Timken induction heaters can be used for heating gear wheels, bushings, couplings and other components. Proper mounting may lengthen the life span of your equipment, and controlled induction heating helps to prevent unnecessary damage.

Digital electronics provide optimum control during the heating process and automatically select the most efficient power supply to help ensure balanced and fast heating.

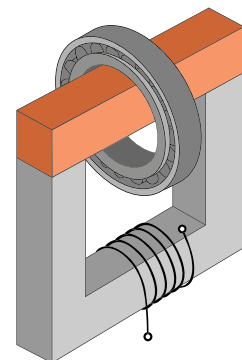

Induction heaters with this icon next to them means that it comes with a plug and is ready to use.

MODELS



VHIN10 Model

Portable design, easy to use, ideal for on-site jobs. Includes four yokes.

Min. Bore 15 mm (0.6")
Max. O.D. 210 mm (8.3")
Max. Width 120 mm (4.8")
Max. Weight 15 kg (33 lbs.)



VHIN33 Model

Powerful turbo design. Automatically selects the most effective power setting to ensure optimal and balanced heating.

Min. Bore 10 mm (0.4")
Max. O.D. 350 mm (13.8")
Max. Width 135 mm (5.3")
Max. Weight 40 kg (88.2 lbs.)

** Not available in the U.S. or Canada*



VHIN35 Model

Basic model with choice of four yokes. Picture at left shows optional vertical support arm.

Min. Bore 15 mm (0.6")
Max. O.D. 480 mm (18.9")
Max. Width 150 mm (5.9")
Max. Weight 35 kg (77 lbs.)



VHIS35 Model

This bench-top model features a unique swing arm for ergonomic working.

Min. Bore 15 mm (0.6")
Max. O.D. 480 mm (18.9")
Max. Width 150 mm (5.9")
Max. Weight 35 kg (77 lbs.)

MODELS – CONTINUED

POPULAR CHOICE



VHIS75 Model Turbo Design

Plug & Heat turbo swing arm model.

Min. Bore 15 mm (0.6")
Max. O.D. 750 mm (29.5")
Max. Width 230 mm (9.1")
Max. Weight 95 kg (209.4 lb)



VHIS100 Model

Large capacity bench-top model with swing arm.

Min. Bore 30 mm (1.2")
Max. O.D. 720 mm (28.3")
Max. Width 200 mm (7.9")
Max. Weight 125 kg (275 lbs.)



VHIS200 Model

Mobile heavy-duty heater with unique swing arm.

Min. Bore 30 mm (1.2")
Max. O.D. 1020 mm (40.2")
Max. Width 265 mm (10.4")
Max. Weight 250 kg (551 lbs.)



VHIS300 Model

Mobile heavy-duty heater with unique swing arm.

Min. Bore 30 mm (1.2")
Max. O.D. 1020 mm (40.2")
Max. Width 265 mm (10.4")
Max. Weight 350 kg (772 lbs.)



VHIS400 Models Turbo Design

Mobile extra-powerful heater with unique swing arm.

Min. Bore 60 mm (2.4")
Max. O.D. 920 mm (36.2")
Max. Width 350 mm (13.8")
Max. Weight 550 kg (1,212 lbs.)



VHIN550 Models

Powerful heater for exceptionally heavy components up to 600 kg (1,322 lbs.). Popular in workshops within steel mills, paper mills and gear box manufacturing. Heats parts in horizontal and vertical positions.

Min. Bore 85 mm (3.4")
Max. O.D. 900 mm (35.4")
Max. Width 400 mm (15.8")
Max. Weight 600 kg (1,322 lbs.)



VHIN800 Models

Powerful heater for exceptionally heavy components up to 1,250 kg (2,750 lbs.). Popular in workshops within steel, rail, wind, paper and gear box operations. Heats parts in horizontal and vertical positions.

Min. Bore 85 mm (3.4")
Max. O.D. 1400 mm (55.1")
Max. Width 420 mm (16.5")
Max. Weight 1250 kg (2,750 lbs.)

Contact your local Timken sales representative for assistance in building a custom solution for extremely large heaters.

INSTALLATION TOOLS • INDUCTION HEATERS

Timken Induction Heaters Technical Data

| Type | VHIN10 | VHIN33 | VHIN35 |
|-------------------------------|------------------------|-------------------------|-------------------------|
| ELECTRICITY | | | |
| Power Rating | 3.6 kVA | 3.6 kVA | 3.6 kVA |
| Available Voltages | 120V • 20A | 120V/230V • 20A | 120V/230V • 20A |
| Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Swing Arm | No | No | No |
| Plug | Yes | Yes | Yes |
| WORK PIECE | | | |
| Max. Weight | | | |
| - Bearings | 15 kg (33.1 lbs.) | 40 kg (88.2 lbs.) | 35 kg (77.2 lbs.) |
| - Other Parts | 10 kg (22.1 lbs.) | 25 kg (55.1 lbs.) | 20 kg (44.1 lbs.) |
| Min. Bore Diameter | 15 mm (0.6") | 10 mm (0.4") | 15 mm (0.6") |
| Max O.D. | 210 mm (8.3") | 350 mm (13.8") | 340/480 mm |
| Vertical/Horizontal | | | (13.39"/18.9") |
| Max. Work Piece Width | 120 mm (4.8") | 135 mm (5.3") | 150 mm (5.9") |
| POLE DIMENSIONS | | | |
| Area between the poles | 120 x 130 mm | 135 x 135 mm | 150 x 140 mm |
| Width x Height | (4.8" x 5.1") | (5.3" x 5.3") | (5.9" x 5.5") |
| Pole Section | 40 mm (1.6") | 95/40 mm | 60 mm (2.4") |
| | | (3.7" x 1.6") | |
| Pole Height | 130 mm (5.1") | 135 mm (5.3") | 140 mm (5.5") |
| CONTROLS | | | |
| Temperature Control | 150° C (302° F) | 240° C (464° F) | 240° C (464° F) |
| Max. Temp | | | |
| Time Control | 0 – 30 Min. | 0 – 45 Min. | 0 – 45 Min. |
| Max. Time | | | |
| Auto Power Reduction | — | Automatically | — |
| DIMENSIONS | | | |
| Dimensions | 435 x 225 x 275 mm | 600 x 220 x 275 mm | 340 x 290 x 310 mm |
| | (17.1" x 8.9" x 10.8") | (23.6" x 8.7" x 10.8") | (13.4" x 11.4" x 12.2") |
| Package Size | 500 x 250 x 350 mm | 650 x 290 x 350 mm | 600 x 450 x 600 mm |
| | (19.7" x 9.8" x 13.8") | (25.6" x 11.4" x 13.8") | (23.6" x 17.7" x 23.6") |
| Mass Heater Body | 21 kg (46.3 lbs.) | 23 kg (50.7 lbs.) | 29 kg (63.9 lbs.) |
| (excludes yokes) | (includes yokes) | | |

Contact your Timken Representative for country-specific part numbers.

| | | VHIS35 | VHIS75 |
|--|--|---|---|
| | | 3.6 kVA 120V/230V • 20A 50/60 Hz Yes Yes | 3.6 kVA 120V/230V • 15A 50/60 Hz Yes Yes |
| | | 35 kg (77.2 lbs.) 20 kg (44.1 lbs.) 15 mm (0.6") 340/480 mm (13.4"/18.9") 150 mm (5.9") | 95 kg (209.4 lbs.) 50 kg (110.2 lbs.) 15 mm (0.6") 520/750 mm (20.5"/29.5") 230 mm (9.1") |
| | | 150 x 140 mm (5.9" x 5.5") 60 mm (2.4") 140 mm (5.5") | 200 x 230 mm (7.9" x 9.1") 120/60 mm (2.4"/4.7") 230 mm (9.1") |
| | | 240° C (464° F) 0 – 45 Min. — | 240° C (464° F) 0 – 45 Min. Automatically |
| | | 340 x 290 x 380 mm (13.4" x 11.4" x 15") 600 x 450 x 600 mm (23.6" x 17.7" x 23.6") 31 kg (68.3 lbs.) | 440 x 370 x 360 mm (17.3" x 14.6" x 14.2") 700 x 500 x 700 mm (27.6" x 19.7" x 27.6") 38 kg (83.8 lbs.) |

INSTALLATION TOOLS • INDUCTION HEATERS

Timken Induction Heaters Technical Data – CONTINUED

| Type | VHIS100 | VHIS200 | VHIS300 |
|--|---|---|---|
| ELECTRICITY | | | |
| Power Rating | 8 kVA | 12 kVA | 24 kVA |
| Available Voltages | 230V/400V/500V/600V • 20A | 500V/900V • 32A | 400V/500V/600V • 63A |
| Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Swing Arm | Yes | Yes | Yes |
| Plug | – | – | – |
| WORK PIECE | | | |
| Max. Weight | | | |
| - Bearings | 125 kg (275.6 lbs.) | 250 kg (551.2 lbs.) | 350 kg (771.6 lbs.) |
| - Other Parts | 75 kg (165.4 lbs.) | 150 kg (330.7 lbs.) | 250 kg (551.2 lbs.) |
| Min. Bore Diameter | 30 mm (1.2") | 30 mm (1.2") | 30 mm (1.2") |
| Max O.D. | 480/720 mm | 700/1020 mm | 700/1020 mm |
| Vertical/Horizontal | (18.9"/28.3") | (27.6"/40.2") | (27.6"/40.2") |
| Max. Work Piece Width | 200 mm (7.9") | 265 mm (10.4") | 265 mm (10.4") |
| POLE DIMENSIONS | | | |
| Area between the poles | 200 x 180 mm | 265 x 310 mm | 265 x 310 mm |
| Width x Height | (7.9" x 9.1") | (10.4" x 12.2") | (10.4" x 12.6") |
| Pole Section | 70 mm (2.8") | 80 mm (3.2") | 110 x 80 mm (4.3" x 3.2") |
| Pole Height | 210 mm (8.3") | 310 mm (12.2") | 320 mm (12.60") |
| CONTROLS | | | |
| Temperature Control | 240° C (464° F) | 240° C (464° F) | 240° C (464° F) |
| Max. Temp | | | |
| Time Control | 0 – 60 Min. | 0 – 99 Min. | 0 – 99 Min. |
| Max. Time | | | |
| Auto Power Reduction | Automatically | Automatically | Automatically |
| DIMENSIONS | | | |
| Dimensions | 630 x 365 x 470 mm (24.8" x 14.4" x 18.5") | 950 x 640 x 1000 mm (37.4" x 25.2" x 39.4") | 950 x 640 x 1000 mm (37.4" x 25.2" x 39.4") |
| Package Size | 700 x 500 x 700 mm (27.6" x 19.7" x 27.6") | 1140 x 750 x 1000 mm (44.9" x 29.5" x 39.4") | 1140 x 750 x 1000 mm (44.9" x 29.5" x 39.4") |
| Mass Heater Body (excludes yokes) | 53 kg (116.8 lbs.) | 120 kg (264.55 lbs.) | 175 kg (385.8 lbs.) |

| | VHIS400 | VHIN550 | VHIN800 |
|--|--|--|--|
| | 12 kVA 400V/500V • 32A 50/60 Hz Yes – | 24 kVA 400V/500V • 63A 50/60 Hz No – | 40 kVA 400V/500V • 100A 50/60 Hz No – |
| | 550 kg (1,212.5 lbs.) 450 kg (992.1 lbs.) 60 mm (2.4") 920 mm (36.2") 350 mm (13.8") | 600 kg (1,322.8 lbs.) 350 kg (771.6 lbs.) 85 mm (3.4") 900 mm (35.4") 400 mm (15.8") | 1250 kg (2,750 lbs.) 750 kg (1,653.5 lbs.) 85 mm (3.4") 1400 mm (55.1") 420 mm (16.5") |
| | 350 x 305 mm (13.8" x 12.0") 170/110 x 80 mm (6.7"/4.3" x 3.2") 305 mm (12.0") | 390 x 400 mm (15.4" x 15.8") 100 mm (3.9") 390 mm (15.4") | 660 x 420 mm (26.0" x 16.5") 150 mm (5.9") 660 mm (26.0") |
| | 240° C (464° F) 0 – 99 Min. Automatically | 240° C (464° F) 0 – 99 Min. Automatically | 240° C (464° F) 0 – 99 Min. Automatically |
| | 1200 x 640 x 1000 mm (47.2" x 25.2" x 39.4") 1250 x 750 x 1000 mm (49.2" x 29.5" x 39.4") | 1000 x 500 x 1350 mm (39.4" x 19.7" x 53.2") 1400 x 700 x 1600 mm (55.1" x 27.6" x 63.0") | 1500 x 600 x 1470 mm (59.1" x 23.6" x 57.9") 1920 x 950 x 1720 mm (75.6" x 37.4" x 67.7") |

INSTALLATION TOOLS • INDUCTION HEATERS

Choose Your Heater

Induction Heater Selection Guide

The size and weight of your product will help determine which heater is right for your equipment. Please note that there is an overlap between models and that the model color on the left corresponds with the colors in the chart. The larger models offer faster product heating.

Selection Guide Using Weight and O.D.


| | | O.D. Diameter | | | | | | | | | |
|------------------|--------------------|-------------------|--------------------|--------------------|---------------------|----------------------|----------------------|----------------------|------------------------|------------------------|-------------------------|
| MODEL 800 | 1400 mm (55") | | | | | | | | | | |
| MODEL 550 | 900 mm (35.4") | | | | | | | | | | |
| MODEL 400 | 920 mm (36.2") | | | | | | | | | | |
| MODEL 300 | 1020 mm (40.2") | | | | | | | | | | |
| MODEL 200 | 1020 mm (40.2") | | | | | | | | | | |
| MODEL 100 | 720 mm (28") | | | | | | | | | | |
| MODELS 75 | 750 mm (29.5") | | | | | | | | | | |
| MODELS 35 | 480 mm (18.9") | | | | | | | | | | |
| MODEL 33 | 350 mm (13.8") | | | | | | | | | | |
| MODEL 10 | 210 mm (8.3") | | | | | | | | | | |
| | | 0 kg (33 lbs.) | 15 kg (33 lbs.) | 35 kg (77 lbs.) | 95 kg (209 lbs.) | 125 kg (275 lbs.) | 250 kg (550 lbs.) | 350 kg (770 lbs.) | 550 kg (1,210 lbs.) | 600 kg (1,320 lbs.) | 1250 kg (2,750 lbs.) |
| | | WEIGHT | | | | | | | | | |

For maximum width see technical specifications on pages 8-11.
Timken will work with you to make sure you have the right plug for your heater and region.

ORDER EXAMPLE

You need a work piece to heat fast for production use. The work piece has an O.D. of nine inches and weighs 16 pounds. You work in the U.S. and need a standard 120V-style plug. Using the chart at left, Timken recommends the VHIS75 model. The order number is VHIS754US.

VHIS75

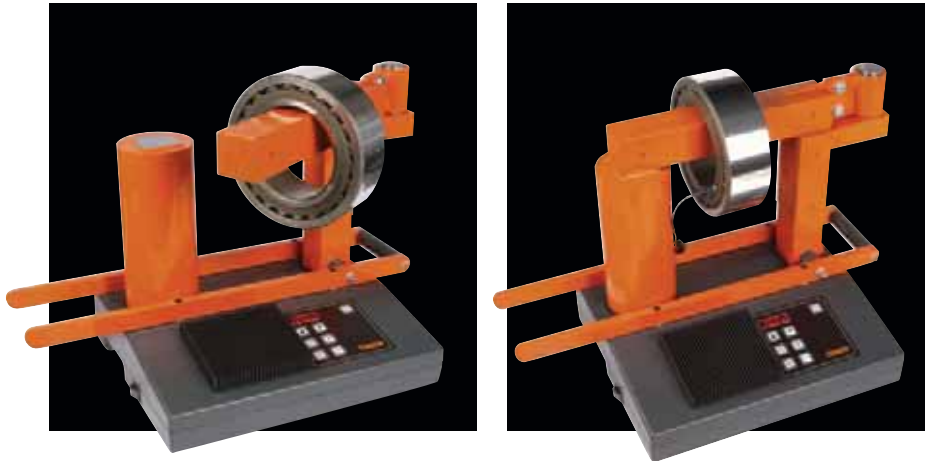

Included With All Timken Heater Models

| | | |
|----------------------|------------------------------|---|
| Electronics | Digital display | Temperature Time Error Report |
| | Sound signal | Yes |
| | Temperature hold | Yes |
| | Demagnetizing, <2A/cm | Yes |
| | Thermal safety guard | Yes |
| Miscellaneous | Magnetic temperature probe | Yes |
| | Yokes, different size | Yes <small>(except 550, 800 and 900 models)</small> |
| | Warranty, electronics | Three years |
| | 400° F Heat-resistant gloves | Yes |
| | Instructions for proper use | Yes |

TECHNICAL HINTS

The product heats too slow...

We advise our customers to heat the work piece in a horizontal position around the pole if possible. This will bring more energy into the work piece since it is closer to the coil. Hanging the work piece on the yoke will create more distance between it and the coil which means less energy and slower heating time. If possible, always place the work piece around the coil to achieve the fastest heating results.

"Handle" broke off...

It's not a handle. It's the base support. It is there to support large O.D.'s that would otherwise hang over the side of the heater.


When I start to heat the product, the part is loud and vibrates...

Make sure you put some Vaseline or grease on the poles, yoke and the bore of the product you are heating. This improves the magnetic field. Please note that it may smoke when you heat the product.


The swing arm could be out of adjustment. Check the setscrew on the pole and adjust it so the yoke makes contact with both poles.

Impact Fitting Tool

Care should be taken when mounting tapered roller bearings. The cup can be mounted in either direction, but the cone can only be mounted from the back face. This ensures that the cage does not overhang. Never mount a cup and cone together or mount a cone from the front face. This will avoid damage to the cage and raceways which could lead to catastrophic failure.

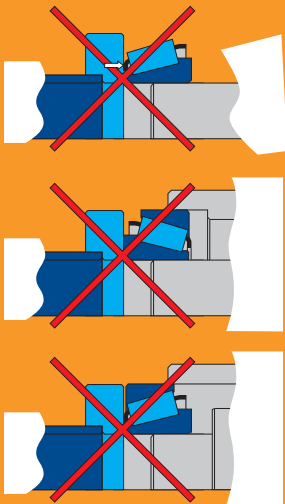

Proper mounting allows the load to be transmitted to the ring experiencing the interference fit. Mounting forces are not transmitted via the rolling elements, helping to prevent damage to the raceways.

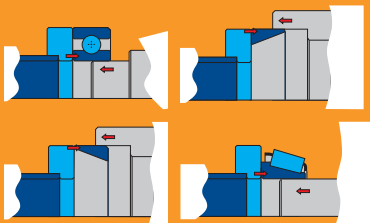

Mounting

Proper mounting is essential to ensure long bearing life. Designed to permit the safe, precise and quick mounting of bearings, bushings, sealing rings, cam wheels and pulleys, the Timken impact fitting tool set features impact-resistant plastic collets. These help deter metal-to-metal contact and the resulting shaft damage.

During the mounting of bearings where the faces lie in the same plane, the collets enable the load to be transmitted to the ring experiencing the interference fit. If the impact mounting tool is used, mounting forces are not transmitted via the rolling elements and damage to the raceways is avoided.



Impact Fitting Tool Warning

- When operating the impact fitting tool, please wear protective clothing, including safety shoes, protective glasses, gloves and helmet.
- Do not use the collets to mount components that have temperatures greater than 80° C (176° F).
- Never mount the cup and cone of a tapered bearing together or mount a cone from the front face.

VIFT3300

This set includes:

- 33 collets ranging from 10 mm to 110 mm
- Three sleeves
- One impact hammer
- Case size: 16.9" x 12.6" x 4.0"



Impact Fitting Tool Selection Guide

| Sleeve | Ring | All ISO Bearing Codes Ending With | 60, 62 63, 64 | 12, 22 13, 23 | 70, 72B 73B | 32, 33 | 222, 213 223 | NU, NJ N 2 3 4 | 302, 322 303, 330 | 320, 313 323, 332 | |
|---|-----------|-----------------------------------|------------------|------------------|----------------|--------|-----------------|-------------------|----------------------|----------------------|-------|
| A1 | 10-26 | 000 | 6000 | 129 | 7000 | | | | | | |
| | 10-30 | 200 | 6200 | 1200 | | 3200 | | | | | |
| | | | 2200 | | | | | | | | |
| | 10-35 | 300 | 6300 | 1300 | 7300 | | | | | | |
| | 12-28 | 001 | 6001 | | | | | | | | |
| | 12-32 | 201 | 6201 | 1201 | | 3201 | | | | | |
| | | | 2201 | | | | | | | | |
| | 12-37 | 301 | 6301 | 1301 | 7301 | | | | | | |
| | | | 2301 | | | | | | | | |
| | 15-32 | 002 | 6002 | | | | | | | | |
| | 15-35 | 202 | 6202 | 1202 | 7202B | 3202 | | | | | |
| | | | 2202 | | | | | | | | |
| | 15-42 | 302 | 6302 | 1302 | | 3302 | | | 30302 | | |
| | | | 2302 | | | | | | | | |
| | 17-35 | 003 | 6003 | | | | | | | | |
| | | | 16003 | | | | | | | | |
| | 17-40 | 203 | 6203 | 1203 | 7203B | 3203 | | | 30203 | | |
| | | 2203 | | | | | | | | | |
| 17-47 | 303 | 6303 | 1303 | 7303B | 3303 | | | 30303 | 32303 | | |
| | | 2303 | | | | | | | | | |
| B2 | 20-42 | 004 | 6004 | | 7004 | | | | | 32004 | |
| | 20-47 | 204 | 6204 | 1204 | 7204B | 3204 | | 204 | 30204 | | |
| | | | 2204 | | | | | | | | |
| | 20-52 | 304 | 6304 | 1304 | 7304B | 3304 | 21304 | 304 | 30304 | 32304 | |
| | | | 403 | 6403 | 2304 | | | | | | |
| | 25-47 | 005 | 6005 | | 7005 | | | | | 32005 | |
| | 25-52 | 205 | 6205 | 1205 | 7205B | 3205 | 22205 | 205 | 30205 | 33205 | |
| | | | 2205 | | | | | 32205 | | | |
| | 25-62 | 305 | 6305 | 1305 | 7305B | 3305 | 21305 | 305 | 30305 | 31305 | |
| | | | 404 | 6404 | 2305 | | | | | 32305 | |
| | 30-55 | 006 | 6006 | | | | | | | 32006 | |
| | 30-62 | 206 | 6206 | 1206 | 7206B | 3206 | 22206 | 206 | 30206 | 33206 | |
| | | | 2206 | | | | | 32206 | | | |
| | 30-72 | 306 | 6306 | 1306 | 7306B | 3306 | 21306 | 306 | 30306 | 31306 | |
| | | | 405 | 6405 | 2206 | | | 405 | | 32306 | |
| | C3 | 35-62 | 007 | 6007 | | 7007 | | | | | 32007 |
| | | 35-72 | 207 | 6207 | 1207 | 7207B | 3207 | 22207 | 207 | 30207 | 33207 |
| | | | 2207 | | | | | 32207 | | | |
| 35-80 | | 307 | 6307 | 1307 | 7307B | 3307 | 21307 | 307 | 30307 | 31307 | |
| | | | 406 | 6406 | 2307 | | | 406 | | 32307 | |
| 40-68 | | 008 | 6008 | | | | | | | 32008 | |
| 40-80 | | 208 | 6208 | 1208 | 7208B | 3208 | 22208 | 208 | 30208 | 33208 | |
| | | | | | | | | 32208 | | | |
| 40-90 | | 308 | 6308 | 1308 | 7308B | 3308 | 21308 | 308 | 30308 | 31308 | |
| | | | 407 | 6407 | 2308 | | 22308 | 407 | | 32308 | |
| 45-75 | | 009 | 6009 | | | | | | | 32009 | |
| 45-85 | | 209 | 6209 | 1209 | 7209B | 3209 | 22209 | 209 | 30209 | 33209 | |
| | | | 2209 | | | | | 32209 | | | |
| 45-100 | | 309 | 6309 | 1309 | 7309B | 3309 | 21309 | 309 | 30309 | 31309 | |
| | | | 408 | 6408 | 2309 | | 22309 | 408 | | 32309 | |
| 50-80 | | 010 | 6010 | | | | | | | 33010 | |
| 50-90 | | 210 | 6210 | 1210 | 7210B | 3210 | 22210 | 210 | 30210 | 33210 | |
| | | 2210 | | | | | 32210 | | | | |
| | | | | | | | | | JM205149/JM205110 | | |
| 50-110 | 310 | 6310 | 1310 | 7310B | 3310 | 21310 | 310 | 30310 | 31310 | | |
| | | 409 | 6409 | 2310 | | 22310 | 409 | | 32310 | | |
| Impact rings 50-90, 45-100, 50-110 also fit the following bearing where only the outer ring is to be fitted, e.g., shaft not installed: | | | | | | | | | | | |
| C3 | 50-90 | | 6011 | | | | | | | | |
| | | | 6012 | | | | | | | | |
| | 45-100 | | 6013 | 1211 | 7211B | 3211 | 22211 | 211 | | | |
| | | | 6211 | 2211 | 7212B | | | | | | |
| | 50-110 | | 6014 | 1212 | 7213B | 3212 | 22212 | 212 | | | |
| | | | 6015 | 1213 | | 3213 | 22213 | 213 | | | |
| | | | 6212 | 2213 | | 3211 | 21311 | 311 | | | |
| | | | 6213 | 2213 | | | 22311 | 410 | | | |
| | | | 6311 | 1311 | | | | | | | |
| | | | 6410 | 2311 | | | | | | | |

For tapered bearings, impact rings fit outer ring and also inner ring if driving from large-diameter side. The numbers on each impact ring (e.g., 25-62) are clearly marked on the ring. The first figure refers to shaft diameter, the second to bearing outer diameter.

Puller Warning

- Check condition of puller before use.
- If there are indications of wear and tear such as ground-down parts, overloaded parts, or worn-out parts, exchange them with new parts.
- Do not use a hammer when operating spindle.
- If any indications of overload, stiff working, etc., occur during pulling, please stop the procedure at once. Try to use a larger or different type of puller if necessary.
- For proper puller engagement, the jaws/legs should be centered.
- When pulling, make sure puller and pulled parts are kept covered by the safety blanket to provide protection from injury caused by flying parts should a part ever break.
- When operating the puller, please wear protective clothing, including safety shoes, protective glasses, gloves and helmet.
- Spindle and puller body should always be kept clean and oiled.
- Make sure you avoid puller overload, as it can result in breakage of the puller's arms and/or beam. This breakage can cause damage to the puller, shaft and bearing as well as personal injury.

REMOVAL TOOLS



Hydraulic & Self-Centering Hydraulic Pullers

Timken carries a wide range of self-contained portable hydraulic and mechanical pulling systems that have capacities from four to 30 tons. They are ideal for removing all kinds of shaft-fitted parts.



Advantages

- Integrated pump, cylinder, hose and puller with safety-release valve.
- Compact design: The self-contained hydraulic pump and puller saves space.
- Sets are supplied in a handy carrying case.
- Multi-purpose: Ideal for pulling a wide variety of press-fit parts including bearings, wheels, bushings, gears and pulleys.
- The pump handle rotates 360-degrees, enabling users to pull from the most convenient position.
- Pullers can be used with two or three legs.
- Available with accessories.

NEW

Self-Centering Hydraulic Pullers

The same power as our standard models, but with the added convenience of hand operation. No more fumbling to engage the puller to the part. Self-centering makes pulling shaft-fitting parts easy. Self-centering hydraulic pullers come preassembled.



MODELS

NEW Self-Centering Hydraulic Pullers



| MODEL | Max. Withdrawal Force | Arm Length | Width of Grip | STROKE Width | A | B | C | D | E | F | G | MASS |
|--------|-----------------------|----------------|----------------|---------------|--------------|--------------|----------------|---|--------------|--------------|--------------|-----------------|
| VHPS4 | 4 t | 190 mm (7.48") | 325 mm (12.8") | 60 mm (2.4") | 13 mm (0.5") | 10 mm (0.4") | 22 mm (0.9") | - | 40 mm (1.6") | 42 mm (1.7") | 22 mm (0.9") | 8 kg (18 lbs.) |
| VHPS6A | 6 t | 230 mm (9.1") | 380 mm (15") | 70 mm (3.4") | 13 mm (0.5") | 10 mm (0.4") | 22 mm (0.9") | - | 50 mm (2") | 45 mm (1.8") | 23 mm (0.9") | 10 kg (22 lbs.) |
| VHPS8 | 8 t | 280 mm (11") | 450 mm (17.7") | 85 mm (3.4") | 13 mm (0.5") | 13 mm (0.5") | 27.5 mm (1.1") | - | 70 mm (2.7") | 50 mm (2") | 25 mm (1") | 12 kg (26 lbs.) |
| VHPS12 | 12 t | 305 mm (12") | 485 mm (19.1") | 85 mm (3.4") | 15 mm (0.6") | 17 mm (0.7") | 29 mm (1.1") | - | 70 mm (2.7") | 60 mm (2.4") | 28 mm (1.1") | 15 kg (33 lbs.) |
| VHPS20 | 20 t | 365 mm (14.4") | 570 mm (22.4") | 111 mm (4.4") | 20 mm (0.8") | 27 mm (1.1") | 33 mm (1.3") | - | 62mm (2.4") | 80 mm (3.2") | 40 mm (1.6") | 25 kg (55 lbs.) |
| VHPS30 | 30 t | 465 mm (18.3") | 680 mm (26.8") | 111 mm (4.4") | 20 mm (0.8") | 27 mm (1.1") | 38 mm (1.5") | - | 85 mm (3.3") | 98 mm (3.9") | 50 mm (2") | 36 kg (80 lbs.) |

Hydraulic Pullers



| MODEL | Max. Withdrawal Force | 1 | 2 | 3 | A | B | C | D | E | F | G | WEIGHT |
|--------|-----------------------|----------------|----------------|---------------|--------------|--------------|--------------|--------------|---------------|--------------|--------------|--------------------|
| VHPT4 | 4 t | 185 mm (7.3") | 275 mm (10.8") | 60 mm (2.4") | 11 mm (0.4") | 6 mm (0.2") | 22 mm (0.9") | 32 mm (1.3") | 84 mm (3.3") | 42 mm (1.7") | 22 mm (0.9") | 4.5 kg (9.9 lbs.) |
| VHPT6A | 8 t | 230 mm (9.1") | 350 mm (13.8") | 85 mm (3.4") | 11 mm (0.4") | 10 mm (0.4") | 25 mm (1.0") | 51 mm (2.0") | 122 mm (4.8") | 50 mm (2.0") | 25 mm (1.0") | 6.5 kg (14.3 lbs.) |
| VHPT8 | 8 t | 230 mm (9.1") | 350 mm (13.8") | 85 mm (3.4") | 11 mm (0.4") | 10 mm (0.4") | 25 mm (1.0") | 51 mm (2.0") | 122 mm (4.8") | 50 mm (2.0") | 25 mm (1.0") | 6.5 kg (14.3 lbs.) |
| VHPT12 | 12 t | 270 mm (10.6") | 375 mm (14.8") | 85 mm (3.4") | 14 mm (0.6") | 10 mm (0.4") | 29 mm (1.1") | 51 mm (2.0") | 118 mm (4.6") | 60 mm (2.4") | 28 mm (1.1") | 8 kg (17.6 lbs.) |
| VHPT20 | 20 t | 360 mm (14.2") | 520 mm (20.5") | 111 mm (4.4") | 20 mm (0.8") | 27 mm (1.1") | 33 mm (1.3") | 60 mm (2.4") | 161 mm (6.3") | 80 mm (3.2") | 40 mm (1.6") | 22 kg (48.5 lbs.) |
| VHPT30 | 30 t | 360 mm (14.2") | 550 mm (21.7") | 111 mm (4.4") | 20 mm (0.8") | 27 mm (1.1") | 38 mm (1.5") | 60 mm (2.4") | 155 mm (6.1") | 98 mm (3.9") | 50 mm (2.0") | 32 kg (70.6 lbs.) |

Mechanical Pullers



After the required type of puller has been identified, it is easy to choose the most suitable model from the series listed in the catalog.

Please note: Understanding the work space and possibility of gripping will insure proper fit of grip.

Compare size and measurement of the part to be removed to the values indicated in the table to choose the suitable puller. The choice of mechanical puller depends also on required pulling force.

The most important factor is safety; make sure to always choose a larger or stronger puller. Three-arm pullers better distribute the pulling force than two-arm devices, therefore, if there is enough space, three-arm pullers should be the first choice.

For safety purposes and service life of the puller, never exceed the maximum capacity. The capacity data has been determined for new pullers. Normal wear and tear in practice and damage may decrease these figures.

NEW

Mechanical 3-Jaw Pullers


For economical-minded maintenance professionals, Timken offers a simple to use mechanical line of pullers. Our mechanical pullers have a self centering feature – making life easier for you.

MODELS

Mechanical Pullers



| MODEL | Max. Withdrawal Force | Arm Length | Width of Grip | STROKE Width | A | B | C | D | E | F | G | MASS |
|--------------|-----------------------|---------------|----------------|--------------|---------------|--------------|--------------|---|---|---|----------------|--------------------|
| VMPS2 | 2 t | 80 mm (3.1") | 120 mm (4.7") | - | 8.3 mm (0.3") | 6 mm (0.2") | 15 mm (0.6") | - | - | - | 16 mm (0.625") | 1.6 kg (3.5 lbs.) |
| VMPS3 | 3 t | 120 mm (4.7") | 180 mm (7.1") | - | 6 mm (0.2") | 7 mm (0.3") | 15 mm (0.6") | - | - | - | 16 mm (0.625") | 2.3 kg (5.1 lbs.) |
| VMPS5 | 5 t | 160 mm (6.3") | 270 mm (10.6") | - | 11 mm (0.4") | 10 mm (0.4") | 25 mm (1") | - | - | - | 19 mm (.75") | 4.3 kg (9.5 lbs.) |
| VMPS8 | 8 t | 210 mm (8.3") | 300 mm (11.8") | - | 13 mm (0.5") | 14 mm (0.6") | 27 mm (1.1") | - | - | - | 19 mm (.75") | 6.1 kg (13.4 lbs.) |

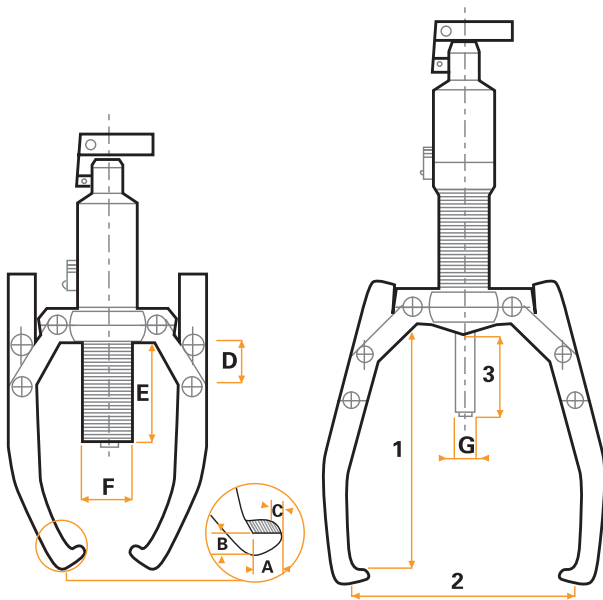

- 1 – Reach
- 2 – Spread
- 3 – Stroke




ACCESSORIES



ACCESSORIES • INDUCTION HEATERS

Induction Heaters



Sliding Support

Sliding support for VHIS 400 for heating in vertical position.



Hammer




Gloves



Support

Support for VHIS 35 for heating in vertical position included with the VHIS 353US.



Yoke Set



Temperature Probe

Each Timken induction heater model is supplied with a magnetic temperature probe. A clamp also is available for nonferrous components. Replacement probes, part number VHIA 100001, can be purchased separately.

ACCESSORIES • HYDRAULIC PULLERS

Hydraulic Pullers



Accessories Set

For use with up to and including 12 tons. These accessory sets are supplied without the hydraulic pump. Use the hydraulic pump off the puller set.

Splitter Accessory Sets (Hydraulic Pump Not Included)

Fits both self-centering and standard hydraulic pullers.

| MODEL | Puller | Arm Length | Width of Grip | Min. O.D. | Max. O.D. | Weight |
|-----------|--------|----------------|----------------|--------------|---------------|---------------------|
| VHPT490* | VHPT4 | 250 mm (9.8") | 110 mm (4.3") | 25 mm (1.0") | 110 mm (4.3") | 8.5 kg (18.7 lbs.) |
| VHPT690A* | VHPT6 | 280 mm (11.0") | 220 mm (8.7") | 50 mm (2.0") | 150 mm (5.9") | 12.5 kg (21.6 lbs.) |
| VHPT890* | VHPT8 | 280 mm (11.0") | 210 mm (8.3") | 50 mm (2.0") | 150 mm (5.9") | 12.5 kg (21.6 lbs.) |
| VHPT1290* | VHPT12 | 325 mm (12.8") | 290 mm (11.4") | 80 mm (3.2") | 225 mm (8.9") | 18 kg (39.7 lbs.) |

* Will work with VHPT/VHIS series.

Safety Instructions

WARNING:

Proper maintenance and handling practices are critical. Failure to follow user manual can result in equipment failure, creating a risk of serious bodily harm.

Induction Heater Warning



DO NOT WEAR METAL OBJECTS OR WATCHES.



PROHIBITED FOR PEOPLE WITH A PACEMAKER AND/OR HEARING AID.



READ THE INSTRUCTIONS.



USE HEAT PROTECTIVE GLOVES.



CAUTION

DO NOT OPERATE AN INDUCTION HEATER IN AREAS WHERE THERE IS A RISK OF AN EXPLOSION.

Hydraulic Puller Warning

- Check condition of puller before use.
- If there are indications of wear and tear such as ground-down parts, overloaded parts, or worn-out parts, exchange them with new parts.
- Do not use a hammer when operating spindle.
- If any indications of overload, stiff working, etc., occur during pulling, please stop the procedure at once. Try to use a larger or different type of puller if necessary.
- For proper puller engagement, the jaws/legs should be centered.
- When pulling, make sure puller and pulled parts are kept covered by the safety blanket to provide protection from injury caused by flying parts should a part ever break.
- When operating the puller, please wear protective clothing, including safety shoes, protective glasses, gloves and helmet.
- Spindle and puller body should always be kept clean and oiled.
- Make sure you avoid puller overload, as it can result in breakage of the puller's arms and/or beam. This breakage can cause damage to the puller, shaft and bearing as well as personal injury.

Impact Fitting Tool Warning

- When operating the impact fitting tool, please wear protective clothing, including safety shoes, protective glasses, gloves and helmet.
- Do not use the collets to mount components that have temperatures greater than 80° C (176° F).
- Never mount the cup and cone of a tapered bearing together or mount a cone from the front face.



WARNING:

Proper maintenance and handling practices are critical. Failure to follow user manual can result in equipment failure, creating a risk of serious bodily harm.

TIMKEN
Where You Turn

Bearings • Steel •
Precision Components • Lubrication •
Seals • Remanufacture and Repair •
Industrial Services

www.timken.com

Timken® is a registered trademark of
The Timken Company

© 2007 The Timken Company
Printed in U.S.A.
10M 06-07-29 Order No. 7710



Pº Uberturu, 50 - Polg. 27 -20014 San Sebastián Guipuzcoa
Telf. 943 44 57 77 - Fax 943 44 53 50 - E-mail
comercial@gaesa.com